


## VDTL-160-FZ - Ford Ranger




Emergency operation from ground  
(valve-bank mounted on pedestal)

Better performance (additional working height and outreach)

■ Length: 6715 mm    ■ Height: 2665 mm    ■ Wheelbase: 3270 mm

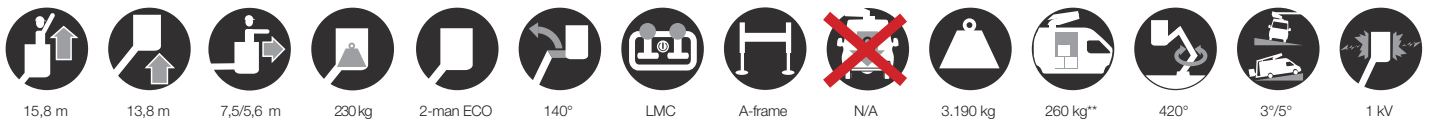

## Diagramme(s)

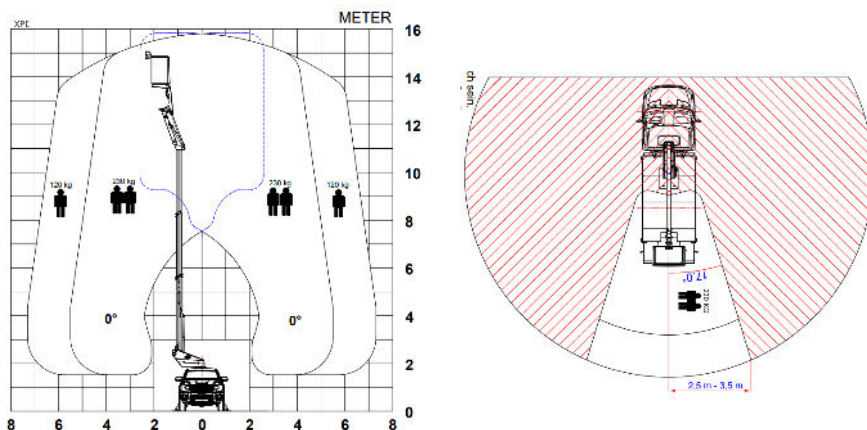

## Options

- Outtrigger pads with holders
- Flashing lights on the roof
- Aluminium cabinets for the chassis
- Safety stripes (red/white)
- Tilt sensor
- Inverter
- Full Home function



Integrated control panel for  
Versalift in cabin



Aluminium cabinets for the chassis (option)



Big fiberglass toolbox  
across flatbed (option)



LMC (Load Moment Control)  
Variable outreach and up to  
2 actions at a time  
(1 per joystick)

## Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

\* Depending on the vehicle.

\*\* Max payload with a driver, a passenger and a full tank of fuel (220 kg added to the installation weight).

## Distributor

**Versalift International**  
Soendervang 3, 9640 Farsoe  
Denmark

+45 9863 2433  
sales@versalift.dk  
versaliftinternational.com